


2Rotor Full Seq COP Basic Coils

Last Changed: 08/06/2021
Harness Required: E33

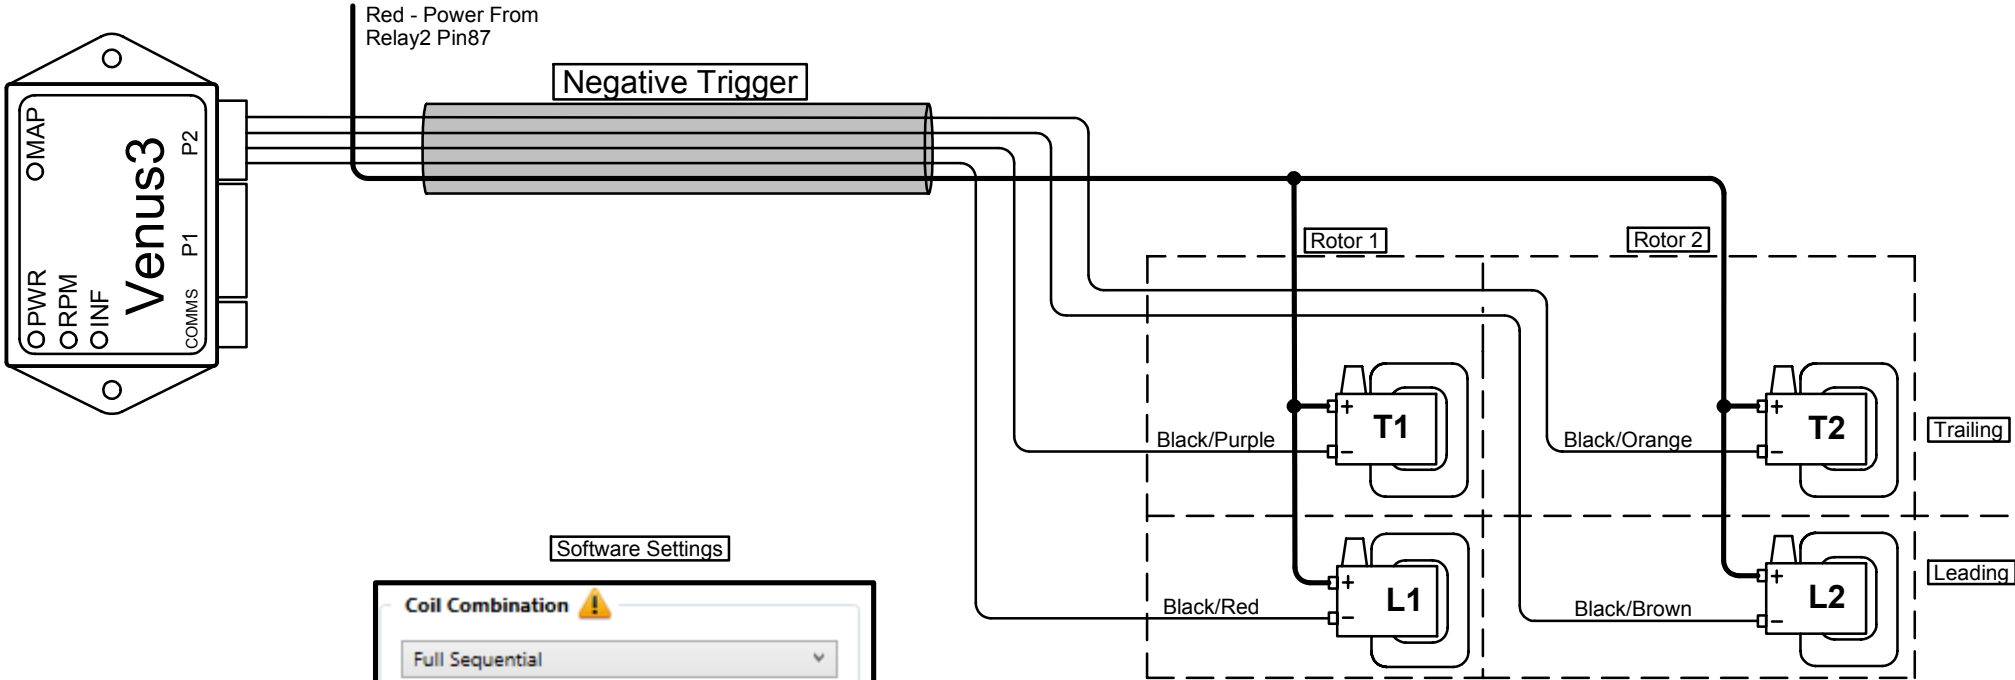

Software Settings

Coil Combination ⚠

Full Sequential

Coil Driver Trigger Combination ⚠

Basic Coil - Use Coil Negative Drivers

Coil Driver Outputs

Coil Driver Output 1 Coil Negative 1

Coil Driver Output 2 Coil Negative 2

Coil Driver Output 3 Coil Negative 3

Coil Driver Output 4 Coil Negative 4

P2

6	7	8	9	10
1	2	3	4	5

Harness Pin View

1. Black/Purple	- Coil T1
2. Black/Orange	- Coil T2
3. Black/White	-
4. Blue	-
5. Blue/Orange	-
6. Black/Red	- Coil L1
7. Black/Brown	- Coil L2
8. Black/Yellow	-
9. Green	-
10. Blue/White	-

Connector Pinouts