



# 2Rotor W/S COP No Drv

Last Changed: 12/11/2018

Harness Required: E33

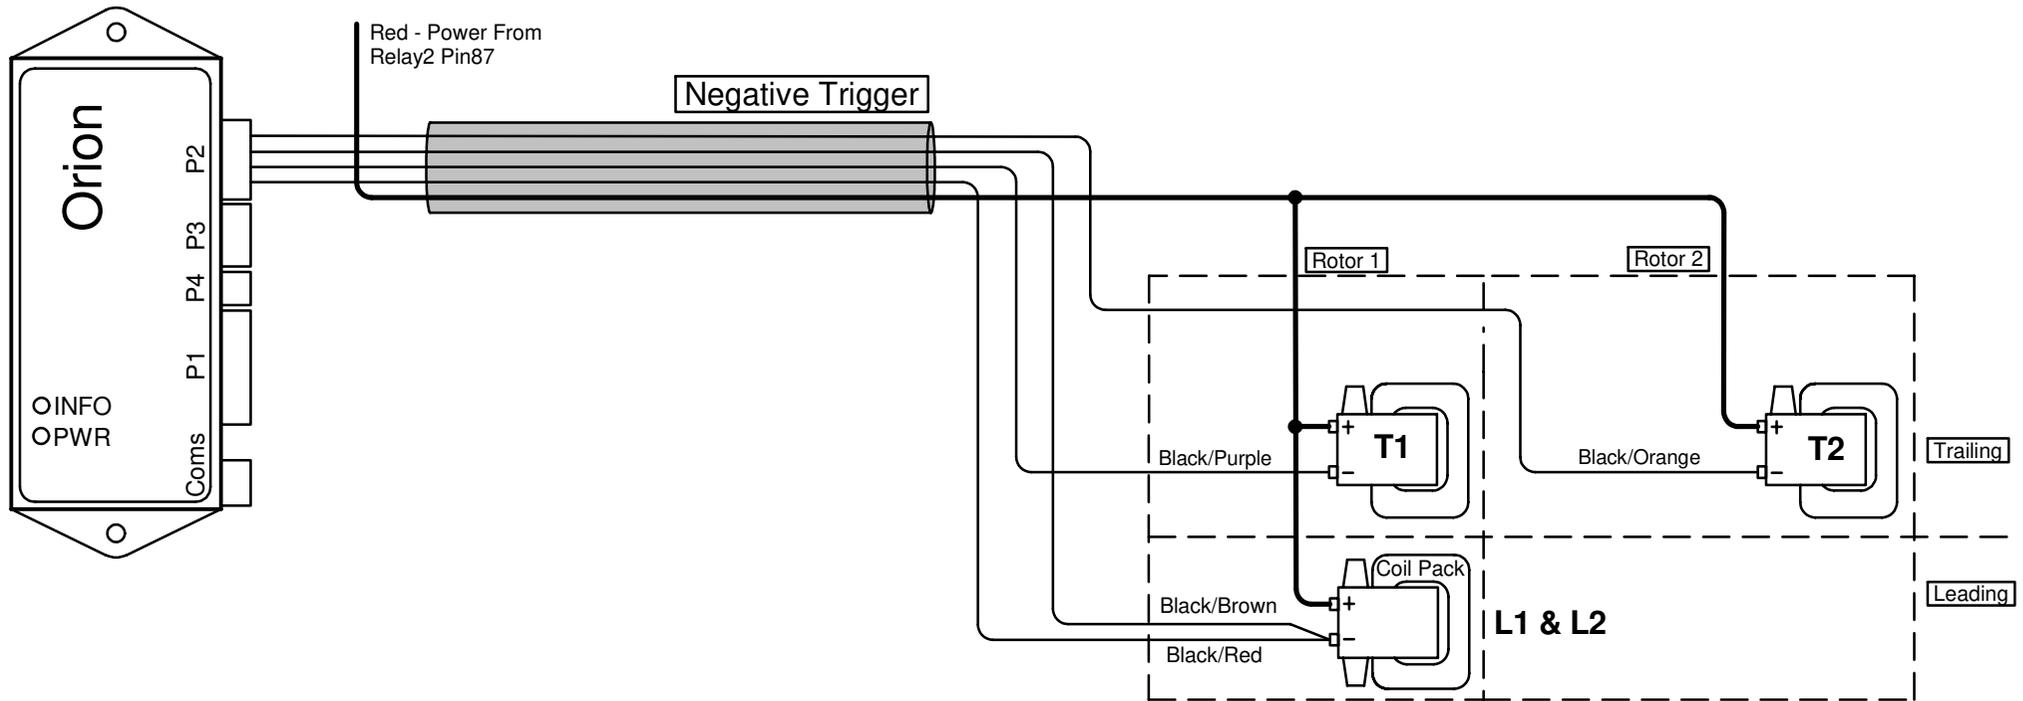

**Note:** The 2 leading coil drivers are tied together on the wasted spark leading coil pack. Software must be set to wasted spark. The trailing coils cannot be shared with a coil pack.



Harness Pin View

- |     |              |                 |
|-----|--------------|-----------------|
| 1.  | Black/Purple | - Coil Drv 2 T1 |
| 2.  | Black/Orange | - Coil Drv 4 T2 |
| 3.  | Black/White  | -               |
| 4.  | Blue         | -               |
| 5.  | Blue/Orange  | -               |
| 6.  | Black/Red    | - Coil Drv 1 L1 |
| 7.  | Black/Brown  | - Coil Drv 3 L2 |
| 8.  | Black/Yellow | -               |
| 9.  | Green        | -               |
| 10. | Blue/White   | -               |

Connector Pinouts

Software Settings

**Coil Combination**

Wasted Spark Coil Pack