


6Cyl V W/S COP Int Add-on

Last Changed: 13/11/2017
Harness Required: MEX01-2 + CV8X01-2

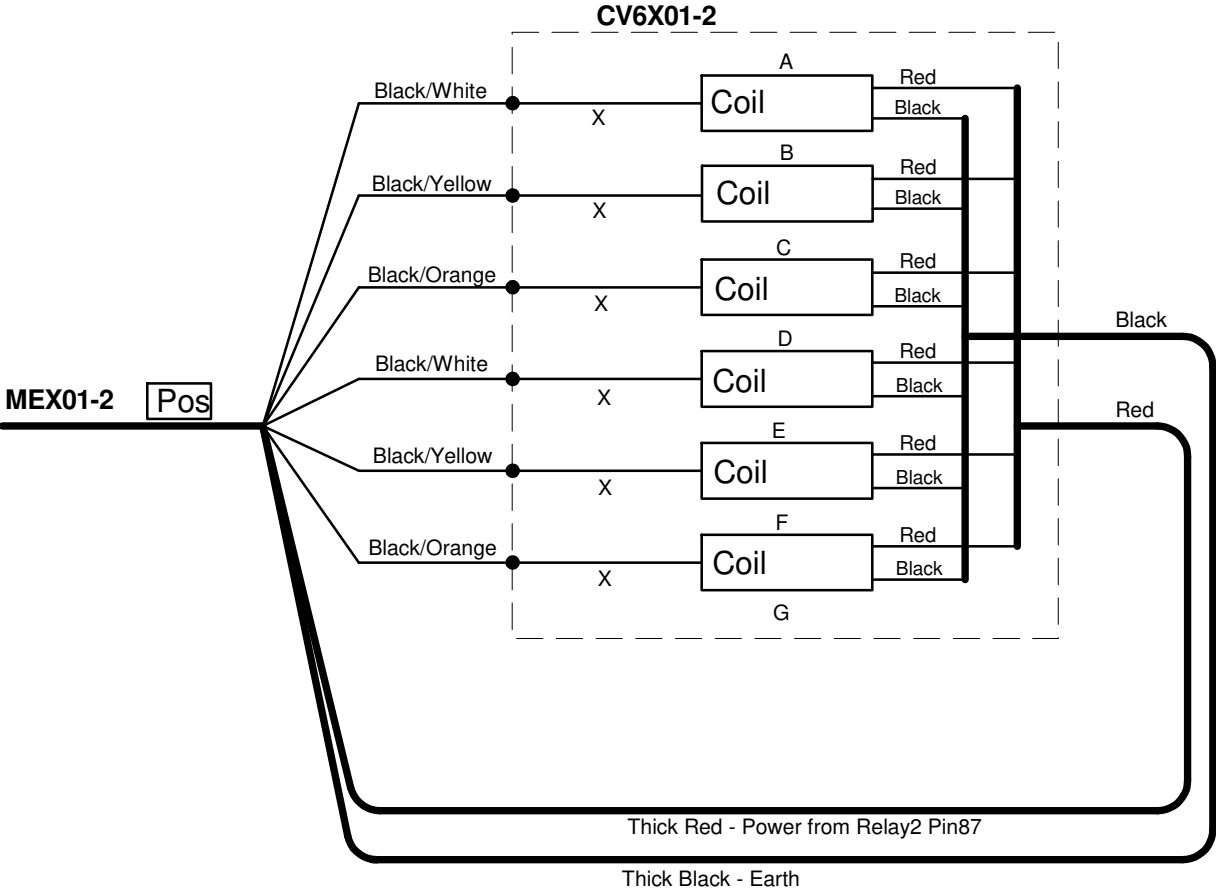

Software Settings

Coil Combination

Wasted Spark Coil Pack

Step 1

A	B	C	D	E	F
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Write your firing order from left to right in the blocks above marked with an alphabetical letter. Then write the corresponding number on the corresponding coil with the same alphabetical letter in the drawing below.

Note: The order of the coils will differ on the placing on the engine, as long as it is connected to the same colour wire as this illustration. Two coils are connected to one wire colour from the MEX01-2 as they are pulsed together. Connect them as such.

Step 2

Front of Engine		Example Ford 3L	
White	<input type="text"/>	Green	2
Black/Yellow	<input type="text"/>	Blue	4
Yellow	<input type="text"/>	Orange	6

Write the cylinder layout of your engine in the blocks above. Make sure which side is the No1 cylinder and how they are numbered on your engine. Then write the corresponding colour of each cylinder next to your coil number on the lines marked X on the drawing. This will ensure that the sequence of spark is correct.

Step 3

Black/White	X
<input type="text"/>	<input type="text"/>

Solder joints and cover it with shrink sleeve

CV6X01-2 = Harness Part numbers
MEX01-2

Pos = Harness Tag Name